


Accuflex Beverage Transfer Products

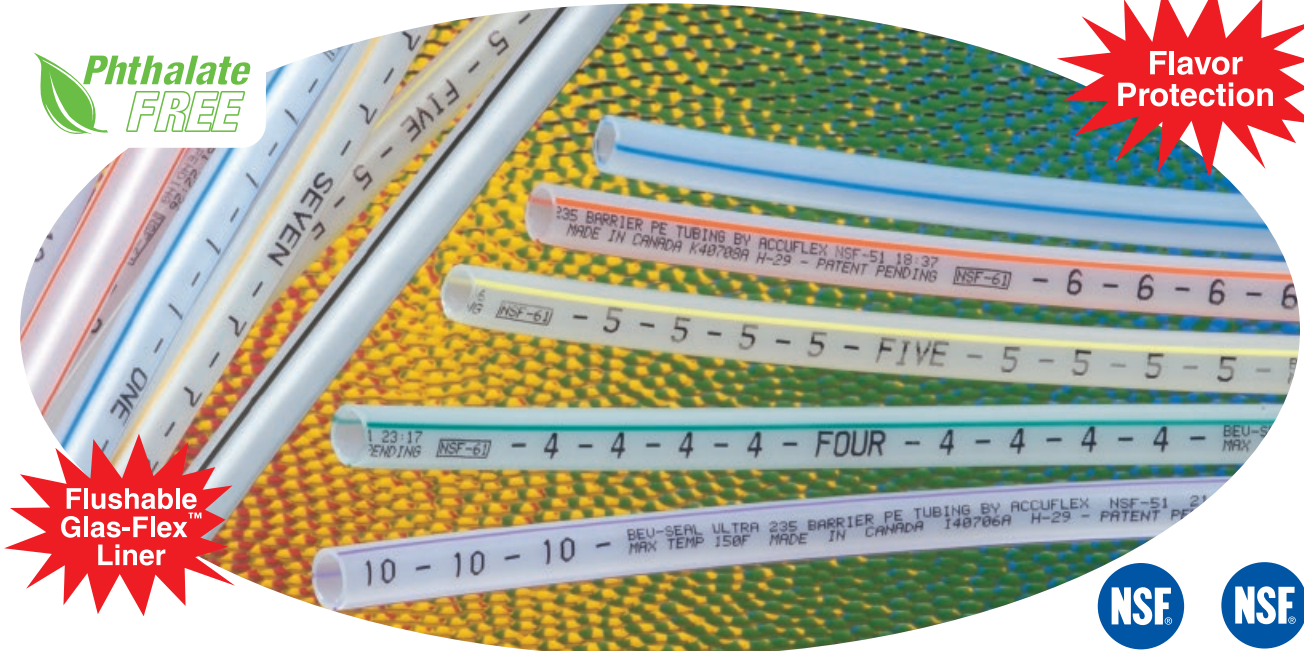

Bev-Seal Ultra® 235 Series Tubing

Unsurpassed oxygen and flavor protection combined with flushability in a coextruded tube.

- **Flushable Glas-Flex™ Liner** — Allows change-overs from even the most pungent flavors with simple flushing procedures.
- **NSF-Certified Products** — Certified under standard NSF-51 for food equipment and NSF-61 for drinking water systems.
- **Dual-Barrier Construction** — Flushable Glas-Flex™ inner liner surrounded by a seamless extruded barrier layer in a coextruded polyolefin tube.
- **Phthalate Free**


Nominal Specifications

Part Number	Standard Package	Nominal		Working Pressure (psi)		Weight per Pkg		Min. Bend Radius (in)	Clamp Size (mm)
		ID (in)	OD (in)	70°F	122°F	(lbs)	(kgs)		
235-05620-XX	1,000' Spool	.190	.313	150	50	23.7	10.8	1.00	8.7
235-06620-XX	500' Spool	.265	.375	125	45	13.2	6.0	1.25	10.0
235-08620-XX	500' Spool	.380	.500	100	40	19.0	8.6	2.25	14.0
235-10620-XX	500' Wrapped Coil	.510	.625	75	30	20.7	9.4	10.00	17.0

Individually numbered and color-coded tubing is available in the standard packaging as well as long-length bulk reels. A typical Part Number is 235-08620-XX for a 500 ft. spool of 3/8" size tubing, where "XX" indicates the number to be imprinted (use "00" for unnumbered tubing). The color coding is in the form of 3 colored strips 120° apart (see photo at right), and number and color coding is as follows:

XX = 01 – Blue; 02 – Black; 03 – Red; 04 – Green; 05 – Yellow; 06 – Orange; 07 – Brown; 08 – White; 09 – Pink; 10 – Purple; 11 – Black; 12 – Red; 13 – Green; 14 – Yellow; 15 – Orange; 16 – Brown, etc.

Note: The "standard packages" are those listed above.

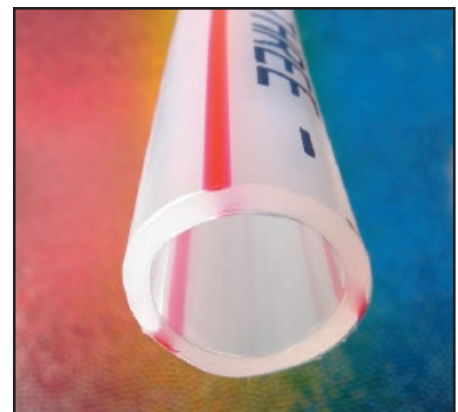

Because we continually examine ways to improve our products, we reserve the right to alter specifications without notice.