




## Ground Joint Couplings

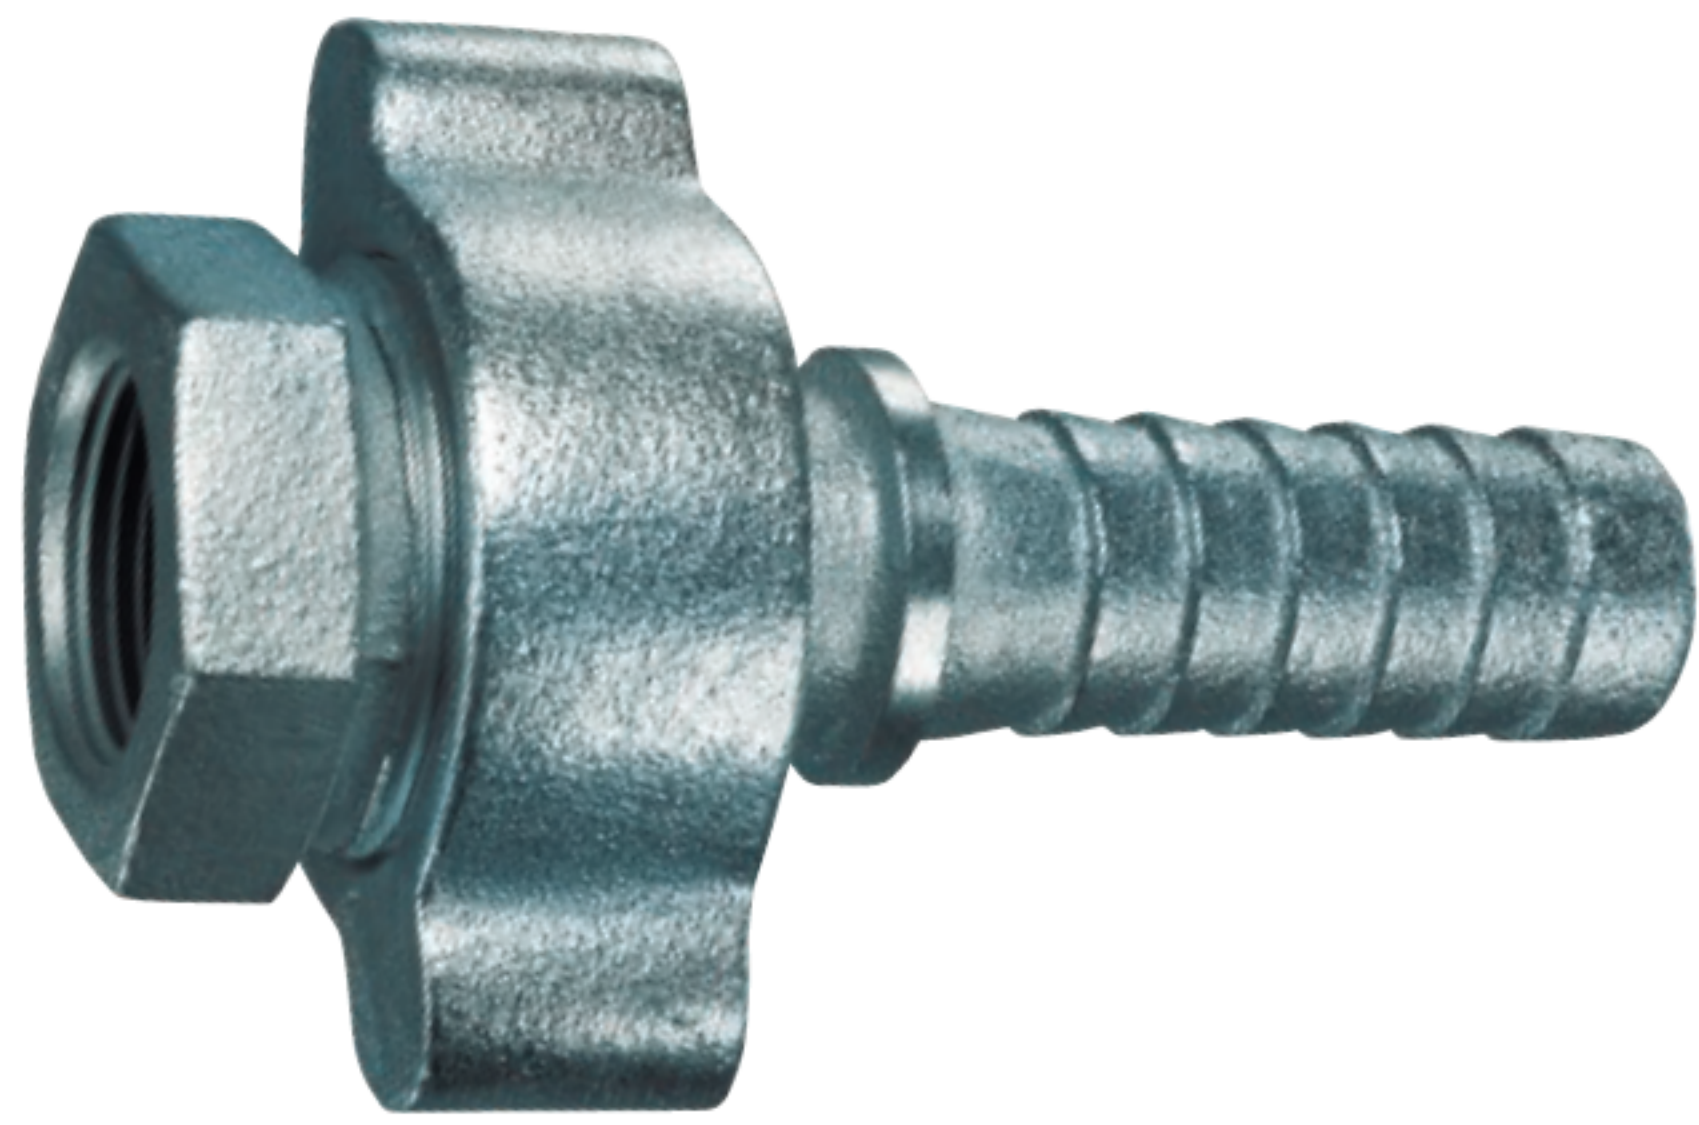

**Hose Stem with Wing Nut and Female NPT Spud  
(Complete Set Consisting of GJS, GJN, GJF)**

Part Number	Size (in.)	Water (psi)	Steam (psi)	Air (psi)	Weight Each (lbs.)	Standard Carton
GJ-050	1/2	600	250	600	0.22	250
GJ-075	3/4	600	250	600	0.43	250
GJ-100	1	600	250	400	0.66	100
GJ-125	1 1/4	600	250	400	1.28	32
GJ-150	1 1/2	600	250	350	1.36	25
GJ-200	2	600	250	300	2.32	20
GJ-250	2 1/2	450	250	300	4.06	8
GJ-300	3	450	250	300	5.63	6
GJ-400	4	450	250	300	10.79	3

Temperature: 450°F (+232°C)

Note: Interlocking Bolt Clamps recommended when assembling to a hose.




**Wing Nut (NPS Threads)**

Part Number	Size (in.)	Water (psi)	Steam (psi)	Air (psi)	Weight Each (lbs.)	Standard Carton
GJN-050	1/2	600	250	600	0.31	200
GJN-075	3/4	600	250	600	0.71	60
GJN-100	1	600	250	400	0.71	60
GJN-125	1 1/4	600	250	400	1.52	40
GJN-150	1 1/2	600	250	350	1.52	40
GJN-200	2	600	250	300	2.54	24
GJN-250	2 1/2	450	250	300	4.65	10
GJN-300	3	450	250	300	5.51	10
GJN-400	4	450	250	300	10.63	4

Temperature: 450°F (+232°C)

Note: Interlocking Bolt Clamps recommended when assembling to a hose.

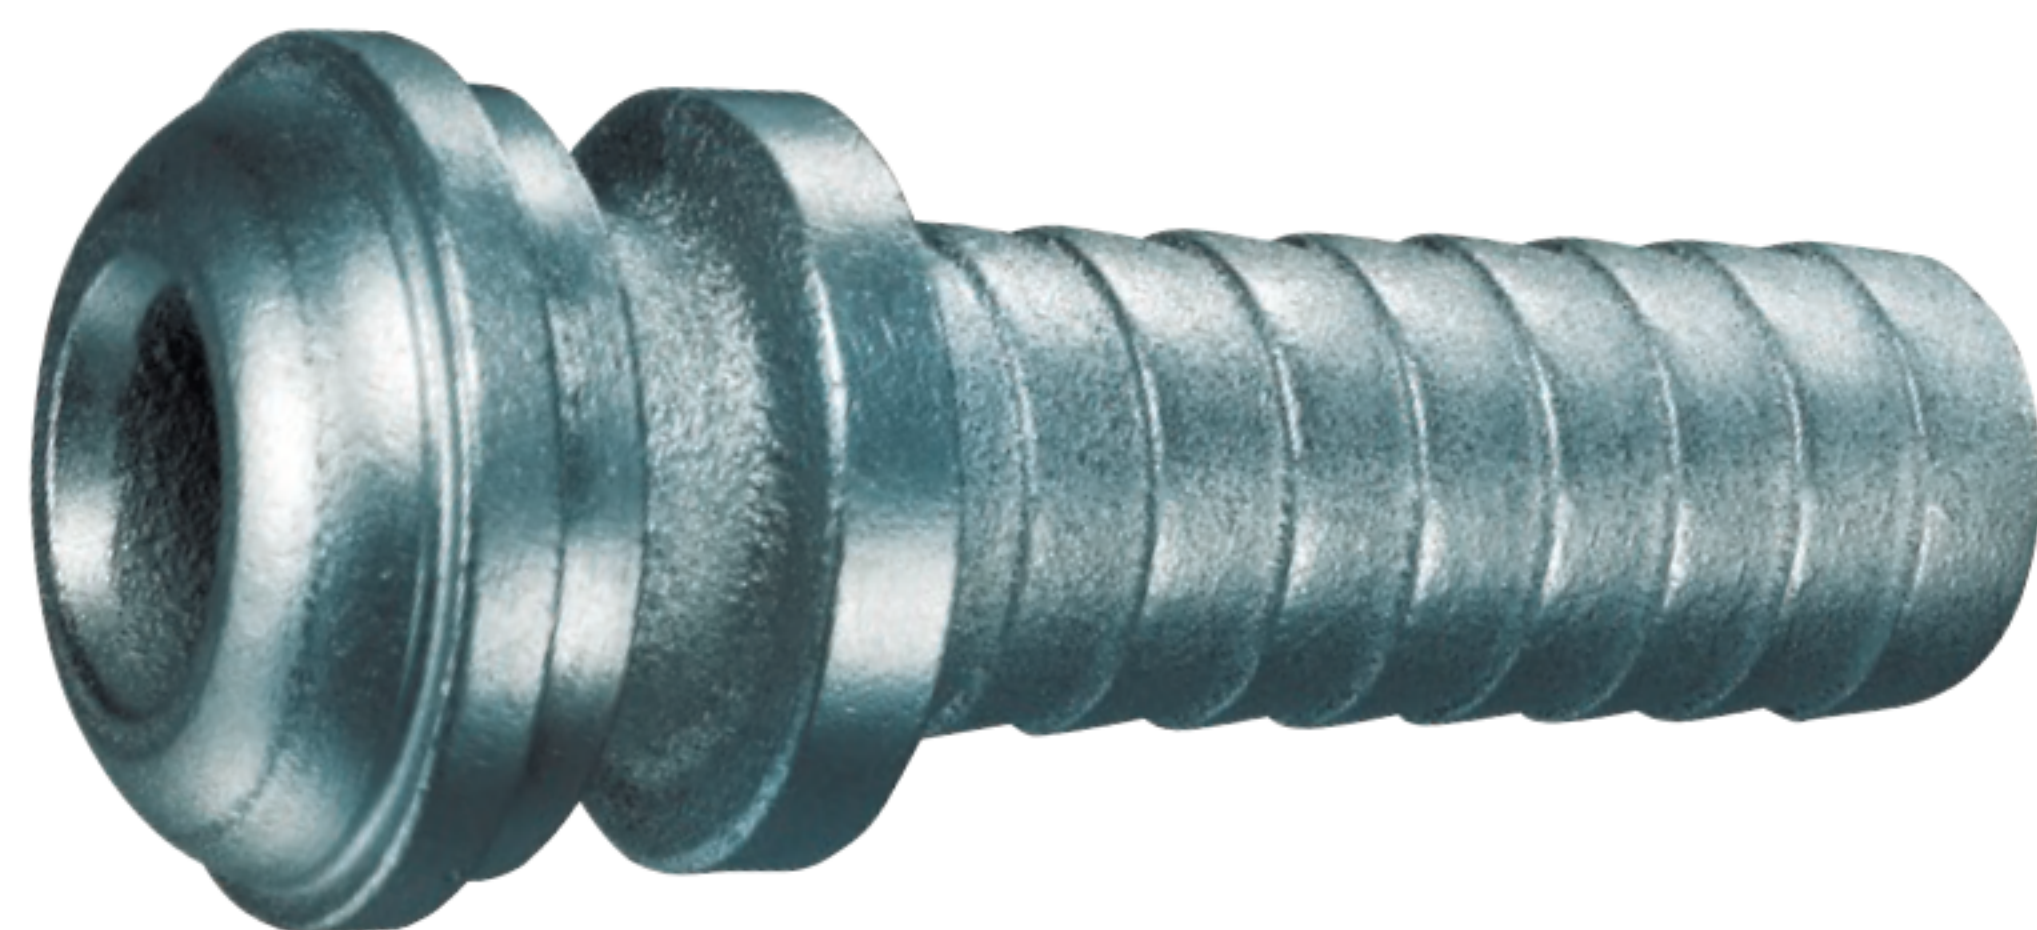

**Hose Stem**

Part Number	Size (in.)	Water (psi)	Steam (psi)	Air (psi)	Weight Each (lbs.)	Standard Carton
GJS-050	1/2	600	250	600	0.18	200
GJS-075	3/4	600	250	600	0.55	100
GJS-100	1	600	250	400	0.81	100
GJS-125	1 1/4	600	250	400	1.17	32
GJS-150	1 1/2	600	250	350	1.30	35
GJS-200	2	600	250	300	1.72	25
GJS-250	2 1/2	450	250	300	3.70	10
GJS-300	3	450	250	300	4.83	8
GJS-400	4	450	250	300	8.95	4

Temperature: 450°F (+232°C)

Note: Interlocking Bolt Clamps recommended when assembling to a hose.



**Female Spud with Copper Seal  
(Female NPT x Male NPS)**

Part Number	Size (in.)	Water (psi)	Steam (psi)	Air (psi)	Weight Each (lbs.)	Standard Carton
GJF-050	1/2	600	250	600	0.29	200
GJF-075	3/4	600	250	600	0.64	100
GJF-100	1	600	250	400	0.57	100
GJF-125	1 1/4	600	250	400	1.21	40
GJF-150	1 1/2	600	250	350	1.04	40
GJF-200	2	600	250	300	1.39	32
GJF-250	2 1/2	450	250	300	4.23	12
GJF-300	3	450	250	300	5.51	10
GJF-400	4	450	250	300	8.88	5

Temperature: 450°F (+232°C)

Note: Interlocking Bolt Clamps recommended when assembling to a hose.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## Ground Joint Couplings



**Male Spud with Copper Seal  
(Male NPT x Male NPS)**

Part Number	Size (in.)	Water (psi)	Steam (psi)	Air (psi)	Weight Each (lbs.)	Standard Carton
GMS-050	1/2	600	250	600	0.29	100
GMS-075	3/4	600	250	600	0.75	60
GMS-100	1	600	250	400	0.79	50
GMS-125	1 1/4	600	250	400	1.43	30
GMS-150	1 1/2	600	250	350	1.70	30
GMS-200	2	600	250	300	2.23	30

Temperature: 450°F (+232°C)

Note: Interlocking Bolt Clamps recommended when assembling to a hose.



**Double Spud with Copper Seal  
(Male NPS x Male NPS)**

Part Number	Size (in.)	Water (psi)	Steam (psi)	Air (psi)	Weight Each (lbs.)	Standard Carton
GDS-050	1/2	600	250	600	0.40	100
GDS-075	3/4	600	250	600	1.32	60
GDS-100	1	600	250	400	1.32	50
GDS-125	1 1/4	600	250	400	1.41	30
GDS-150	1 1/2	600	250	350	1.41	30
GDS-200	2	600	250	300	1.92	24

Temperature: 450°F (+232°C)

Note: Interlocking Bolt Clamps recommended when assembling to a hose.



**Threaded Male Hose Shank  
(Male NPT x Hose Shank)**

Part Number	Size (in.)	Water (psi)	Steam (psi)	Air (psi)	Weight Each (lbs.)	Standard Carton
GJM-050	1/2	600	250	600	0.17	250
GJM-075	3/4	600	250	600	0.33	250
GJM-100	1	600	250	400	0.55	100
GJM-125	1 1/4	600	250	400	1.28	32
GJM-150	1 1/2	600	250	350	1.79	25
GJM-200	2	600	250	300	2.65	20
GJM-250	2 1/2	450	250	300	4.83	8
GJM-300	3	450	250	300	6.26	6
GJM-400	4	450	250	300	11.40	3

Temperature: 450°F (+232°C)

Note: Interlocking Bolt Clamps recommended when assembling to a hose.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.