


A1263 Series Low Temperature Non-Toxic PVC Air Breathing Hose

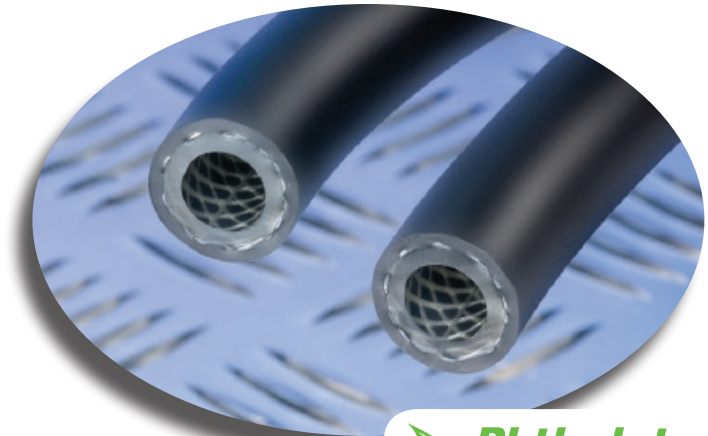

This specially-designed non-toxic/low odor air breathing hose provides air service in extreme low temperature conditions.

Construction:

- Tube — Clear PVC compound, formulated in compliance with FDA⁽⁰³⁾ and RoHS⁽¹⁶⁾ requirements.
- Reinforcement — High tensile strength yarn.
- Cover — Non-toxic, U. V. and weather resistant black PVC compound.

Features:

- Provides increased low temperature flexibility versus Series A1243 hose.
- Low odor, compared with traditional rubber hose.
- Heavy wall construction matches the dimensions of rubber hose.

- One-piece lengths.
- Hose meets NIOSH⁽¹⁴⁾ requirements for Type C respirator.
- Phthalate Free!

Applications:

- Outdoor, open air service in extreme low temperature conditions.
- General Type C air supply lines.
- Paint spray booths.
- Indoor, in-plant air service.

Service Temperature Range: -40°F (-40°C) to +150°F (+65°C)

Nominal Specifications

Series No.	Size Code	Nominal ID		Nominal OD		Max. Working Pressure† (PSI)		Standard Length Coils	Approx. Wt. per Pkg.
		(In)	(mm)	(In)	(mm)	@ 70°F (20°C)	@ 122°F (50°C)		
A1263	04	1/4	6.5	.585	14.9	300	180	500 ft.	64 lbs.
A1263	06	3/8	9.5	.720	18.3	300	180	300 ft.	52 lbs.

† Note: Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

NOTE: NIOSH only certifies complete breathing respirators and does not issue certifications on individual components, such as hoses. All replacement hoses for NIOSH-certified apparatus must have prior NIOSH certification as a part of that unit.

NOTE: For details of the following compliances mentioned above, refer to footnotes listed on page 63.

FDA⁽⁰³⁾, NIOSH⁽¹⁴⁾, PHTHALATE FREE⁽¹⁵⁾, RoHS⁽¹⁶⁾

Please refer to the back page for the location of your nearest warehouse for availability of products/sizes shown.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.